

# Winfield Primary School Proposal

**Submitted to**

Lisa Honaker  
Winfield Primary School  
(630) 909-4905  
lhonaker@winfield34.org

**Contact**

Joe Ruffolo  
(630) 803-5916  
joeruffolo@maulasphalt.com



# Winfield Primary School Proposal

**Submitted to**

Winfield Primary School  
Lisa Honaker  
(630) 909-4905  
lhonaker@winfield34.org

**Proposal Date** 5/18/2026**Project ID** 26-1242**Job Site** 0S150 Winfield Road  
Winfield, IL 60190**Contact**

Joe Ruffolo  
(630) 803-5916  
joeruffolo@maulasphalt.com

## About us

---

**"Let Maul Give Your Parking Lot the Respect it Deserves!"**

**Maul Paving / Concrete / Sealcoating** Is a full-service asphalt and concrete company located in Naperville, IL since 1986. Our service area includes the entire Chicagoland area, Northwest Indiana, and Southern Wisconsin.

Each and every one of our projects is completed by a highly trained and professional staff of Maul employees. We pride ourselves in performing all our work with equipment that represents the latest technology available. When you hire Maul your work is planned, managed and completed by our experienced project management team. Our ultimate goal is to deliver a quality product, with no interruption to your business, and in a timely manner.

Please feel free to visit our website(s) to learn more about us.

[Maulasphalt](#)

[MaulPaving/Facebook](#)

[Maul-Paving/LinkedIn](#)

[Maulnational](#)

## Services

### Winfield Primary School Estimate

#### Striping

\$1,900.00

1. We propose to stripe the parking lot in the designated color meeting or exceeding Illinois State Specifications M-122-96. with the following quantities:
2. 55 Yellow Stripes / 280 linear feet of yellow striping / 1 Handicap blue box (s) / 1 Van Access / 17 arrows / 2 - 4 square / 1 hopscotch / 1 circle
3. Our firm will complete this project in 1 days . In the event that cars are not moved, sprinklers are left on or any other reason we are not able to complete the work on the scheduled day, there will be an addition trip charge of \$500.00 per required trip. (We will not wait for cars etc. to be move or for the pavement to dry due to sprinklers).
4. All work will be performed so that there is minimal interruption to your facility.
5. Number of Mobilizations 1 days **(Weekday)**

#### Crackfill

\$760.00

1. The area under consideration for hot pour crack sealing comprises approx. 1,380 feet Linear of cracks to be sealed.
2. Clean all dirt, loose gravel and weeds from cracks in preparation.
3. Material will be heated with oil jacketed crack sealing system. Material is then applied into base of the crack by speed bander to ensure material seals the base of the crack (material may potentially bend over the top / surface of the pavement).
4. Includes major transverse and reflective cracks 1/4" wide and greater. NO FAILED PAVEMENT AREAS / Alligatored or Spidered Areas (INCLUDES NEW PAVING SEEMS) / driveway surfaces only / no joints.
5. **Material Design:** Sealmaster TM Supreme or comparable product.
6. Estimated linear footage of cracksealing will provide a thorough coverage: Not every crack will be sealed.
7. Number of Mobilizations 1 days **(Weekday)**

#### Sealcoating / Asphalt Based


\$3,968.00

1. The area under consideration comprises approx. 33,074 sq ft.
2. It is the owner's responsibility to have all material, cars, equipment etc. removed from the area where the work will take place.
3. Power blow parking surface with power blowers to remove dirt / debris prior to sealcoating. Remove vegetation from cracks.
4. **Oil Spots** will be wire broomed and treated with Petro Seal to help prevent oil & gas bleeding up through the freshly applied sealant if necessary.
5. **Sealant Material:** Our firm will install premium grade sealer made by Sealmaster Chicago meeting federal specifications RP-355e. Product mix includes Sealmaster Masterseal Asphalt Based Sealer, curing and bonding additives, and fortified with 2-4 lbs. silica sand.
6. We will install your sealant by **2 coats spray or 1 coat squeegee** application.
7. Blockade newly sealed areas.
8. Number of Mobilizations 1 days **(Weekday)**

**Total: \$6,628.00**



# Winfield Primary School Proposal

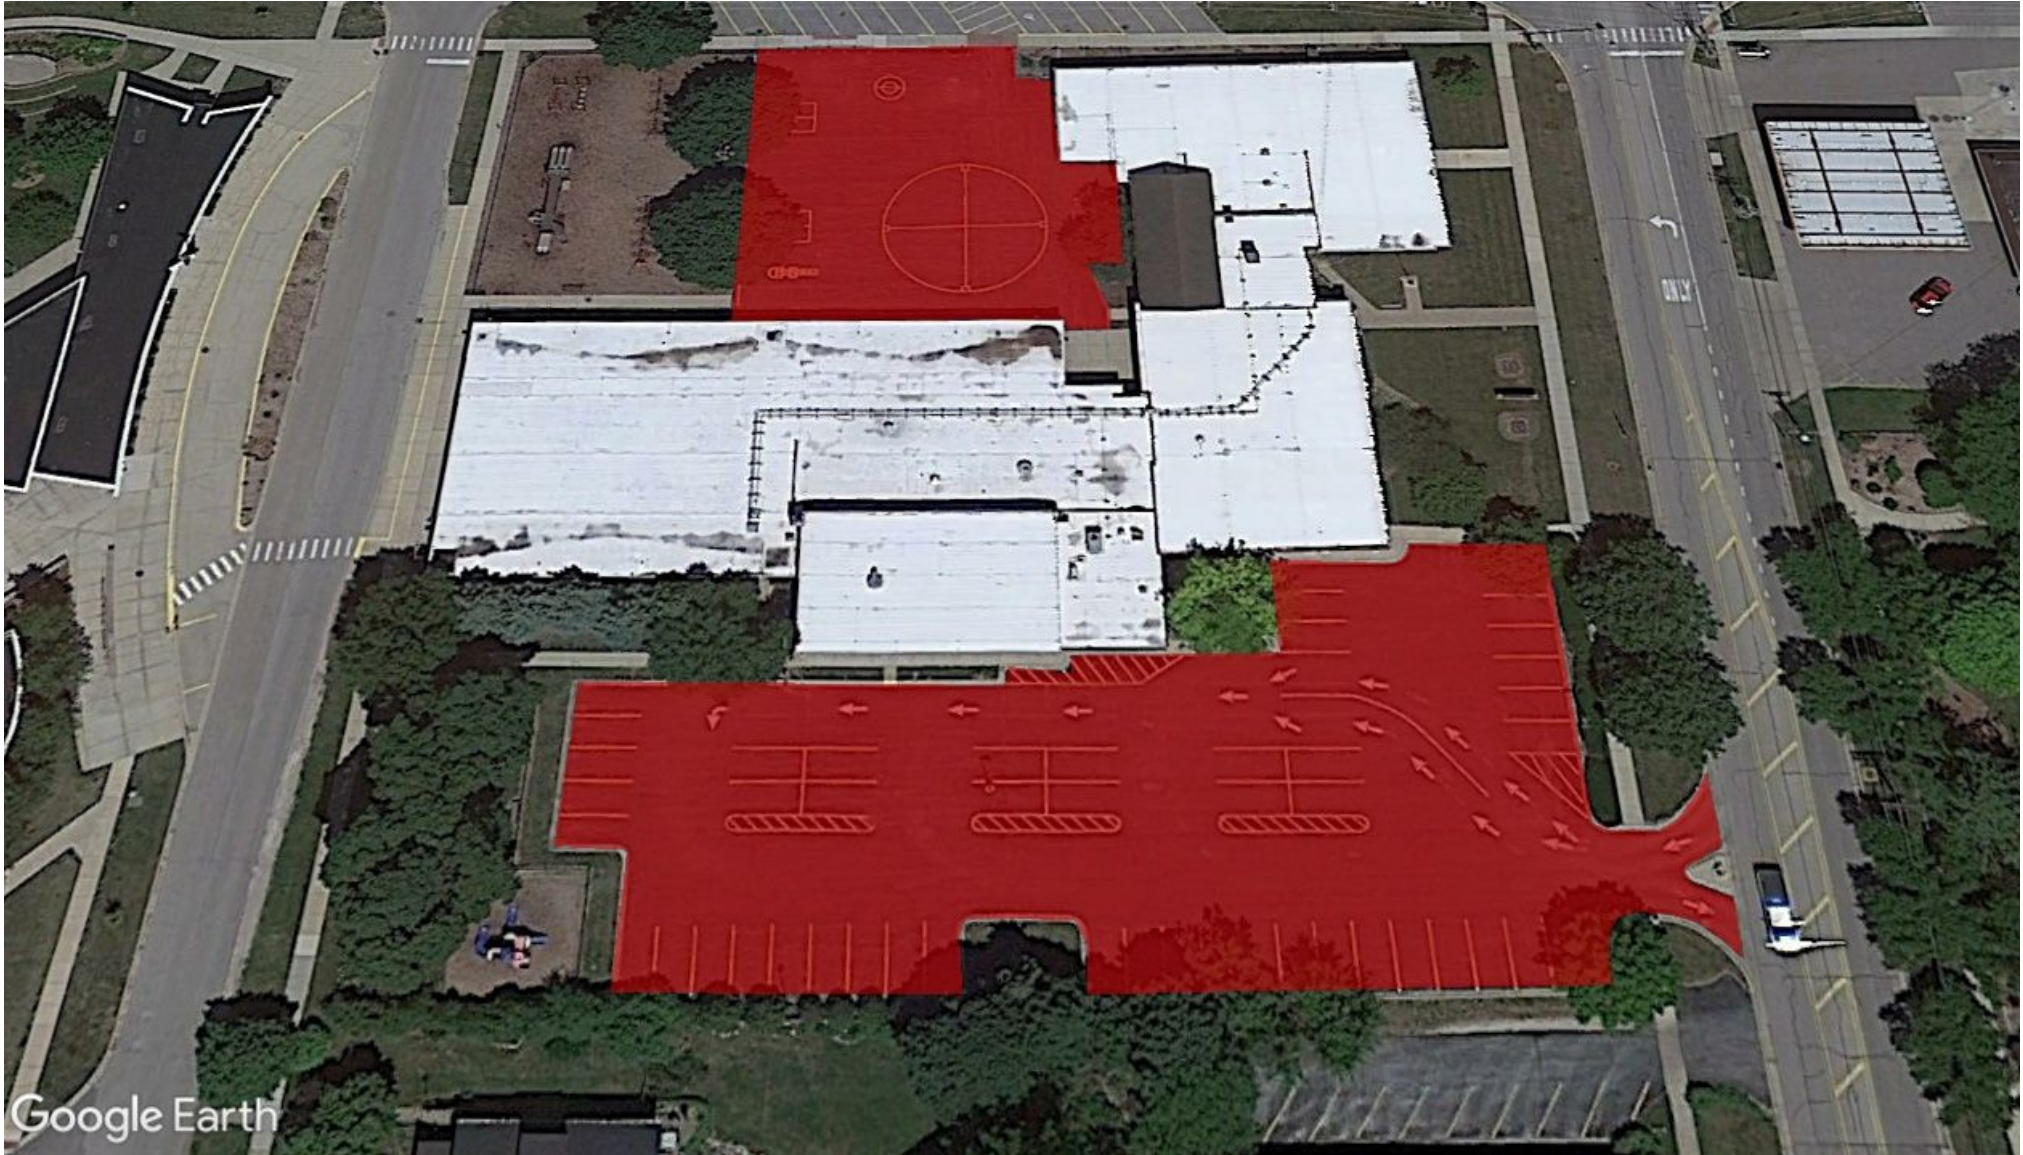

## Other Documents

---

- [Sealcoating Terms](#)



# Winfield Primary School Proposal

## Authorization

---

For this project Winfield Primary School | Project # 26-1242 , we agree to pay the total sum of \$6,628.00 or balance in full 15 days after the completion of work.

I am authorized to approve and sign this project as described in this proposal as well as identified below with our payment terms and options.

## Acceptance

---

You are hereby authorized to proceed with the work as identified in this contract. By signing and returning this contract, you are authorized to proceed with the work as stated.

We understand that if any additional work is required different than stated in this proposal/contract it must be in a new contract or added to this contract.

I am authorized to approve and sign this project as described in this proposal as well as identified below with our payment terms and options.

We agree to pay the total sum or balance in full 15 days after the completion of work.

Please see all attachments for special conditions that may pertain to aspects of this project.

\*\*\*\*COMPLETE INVOICE/BILLING INFORMATION BELOW\*\*\*\*

Company Name: \_\_\_\_\_

Billing Address: \_\_\_\_\_

Billing E-Mail: \_\_\_\_\_

Billing Contact/Phone: \_\_\_\_\_

---

Lisa Honaker  
Winfield Primary School  
lhonaker@winfield34.org

---

Date

---

Joe Ruffolo  
Maul Paving Inc / Maul Enterprises Inc  
joeruffolo@maulasphalt.com