

From: **Thomas Robarge** <thomas@ecbusinessinteriors.com>
Date: Tue, Mar 24, 2026 at 8:19 AM
Subject: Boyceville School District: Casework Demolition & Replacement
To: Nicholas Kaiser <nicholask@boyceville.k12.wi.us>

Good morning Nick,

Please see the attached quotation for the demolition of the existing casework and the new custom casework package for the classrooms and administrative areas. This includes removal and disposal of the existing casework, along with delivery and installation of the new product per the drawings.

A few key items to note:

- Project total: \$68,930.00 (tax exempt)
- Lead time for new casework is approximately 8–11 weeks from order entry
- Work is planned to align with a summer installation schedule
- Demolition scope does not include plumbing or electrical (if required)

We will complete one final field measurement prior to placing the order and can walk through the quote and drawings together to ensure everything is covered as expected. Let me know if you'd like to schedule a time to review or make any adjustments. Once everything looks good on your end, we can coordinate next steps and timing to keep things on track for summer.

Thank you,



Thomas Robarge
General Manager
Eau Claire Business Interiors
[2224 Mercantile Drive](#)
[Eau Claire, WI 54703](#)
[Phone: 715-833-2300](#)
[Fax: 715-833-2180](#)
[Cell Phone: 715-210-1274](#)



QUOTATION:

26-0324-DR

Date Issued:

3/24/26

Page:

1 of 4

To: Boyceville Community School District
1003 Tiffany Street
Boyceville, WI 54725

Attn: Nick Kaiser
Phone: 715-643-3647
Email: nicholask@boyceville.k12.wi.us

We are pleased to quote you as follows:

QUANTITY ITEM NUMBER AND DESCRIPTION

DEMOLITION OF EXISTING CUSTOM PLASTIC LAMINATE CASEWORK

- 1 ea Labor And Materials To Remove And Dispose Of All Casework Sections Per Customer Request. Rooms Included Are Below: 321, 333, 334, 345, 346, 347 and 401
* EC Business Interiors Demolition Work Does Not Include Plumbing Or Electrical Work, If Required To Complete Scope

CUSTOM PLASTIC LAMINATE CASEWORK

Manufactured Custom Plastic Laminate Casework (Throughout)

District Office Counter Tops and Classroom Laminate: Wilsonart, Pattern: Sierra Cascade 5005-38
Classroom Cabinets Laminate: Panolam, Pattern: Pepperdust HP451SD
Reception Desk Shell (Room 321) Laminate: Pionite, Pattern: Absolute Acadjou WY1605D
Reception Desk Platform Laminate: WilsonArt, Pattern: Slate Grey D91-60 Matte Finish
Edge Banding: Self Edge To Match Surface Laminate
Locks: Provide locks on casework drawers and doors where indicated on drawings.
Fixed Standard Shelf and Workstation Brackets where indicated on drawings.
Shelves In Cabinets: Shelf Standards and Rests: Plastic Shelf Supports With Steel Pins.
Swining Doors: Hinges, Pulls and Catches: Concealed Hinges, Chrome Wire Pulls, Magnetic Catches
Drawers: Pulls and Slides: Chrome Wire Pulls, Standard Full Extension Arms For Slides

Area: Room 321 - Tops & Misc. Items

* Per Drawing A1 (Dated 03.18.2026)
* Laminate WilsonArt Sierra Cascade 5005-38, Unless Noted Otherwise)
* 1-1/8" Thick Surfaces, Unless Noted Otherwise)

- 1 ea Area: Administration Office, Custom PLAM Surfac With Backsplash
* ECBI To Field Cut For Sink Location
1 ea Area: Behind Reception Top, Custom PLAM Surface
2 ea Area: Backroom Tops, Custom PLAM Surface - With 1" Overhang
1 ea Area: Cubby Top, Custom PLAM Surface
2 ea Area: Business Services / Fish Bowl, Custom Modesty Panels To Cover Ht. Adj. Legs, 1/4" Thick PLAM
* Laminate: Pionite Absolute Acajou WY1605D
2 ea Area: Business Services / Fish Bowl, Custom Drawer Units, (1) FF Pedestal and (1) BBF Pedestal
* Laminate: Pionite Absolute Acajou WY1605D
* Locking Drawer Units



QUOTATION:

26-0324-DR

Date Issued:

3/24/26

Page:

2 of 4

To: Boyceville Community School District
 1003 Tiffany Street
 Boyceville, WI 54725

Attn: Nick Kaiser
 Phone: 715-643-3647
 Email: nicholask@boyceville.k12.wi.us

We are pleased to quote you as follows:

QUANTITY ITEM NUMBER AND DESCRIPTION

Area: Room 321 - Admin Assistant

- * Per Drawing A1 (Dated 03.17.2026)
- * Desk Shell / Wall Laminate: Pionite Absolute Acajou WY1605D
- * Transaction Top (Elevation A) Laminate: WilsonArt Slate Grey D91-60
- * Transaction Top (Elevation B) Laminate: Pionite Absolute Acajou WY1605D
- * Height Adjustable / Desk Surface Laminate: Pionite Absolute Acajou WY1605D

1	ea	Area: Room 321 - Admin Assistant, Custom PLAM Desk Unit With Wall Casing * Custom (2) Locking Drawer Units - 2 Drawers Per Unit * Height Adjustable Base For 30"x60" Work Surface, 2-Leg 3 Stage Height Adjustable Base With Height Range: 23" - 48" H, Programmable Presets On Handset; Finish Color: Silver Base Color. * Fixed Table Off Wall * Custom (2) Transaction Tops
1	ea	Area: Room 321 - Admin Assistant, Missing Laminate Piece On Current Existing Product EC Business Interiors To Repair In Field, Size: 28"Wx31"H

Area: Classroom 333

- * Per Drawing A1 (Dated 03.18.2026)
- * Surface Laminate: WilsonArt Sierra Cascade 5005-38
- * Self Edge: WilsonArt Sierra Cascade 5005-38
- * Cabinet Laminate: Panolam, Pattern: Pepperdust HP451SD

1	ea	Area: Classroom 333, Upper/Lower Cabinets With 4" H Backsplash and 4" Toe Kick (1) Adjustable Shelf For Each Storage Cabinet
1	ea	Area: Classroom 333, (1) Wardrobe - 48Wx24Dx84H (4) Adjustable Shelves For Wardrobe Cabinet

Area: Classroom 334

- * Per Drawing A1 (Dated 03.18.2026)
- * Surface Laminate: WilsonArt Sierra Cascade 5005-38
- * Self Edge: WilsonArt Sierra Cascade 5005-38
- * Cabinet Laminate: Panolam, Pattern: Pepperdust HP451SD

1	ea	Area: Classroom 334, Lower Floor Cabinets With 4" H Backsplash, 4" Toe Kick and Filler Pieces (1) Adjustable Shelf For Each Storage Cabinet
---	----	--

Area: Classroom 345

- * Per Drawing A1 (Dated 03.17.2026)
- * Surface Laminate: WilsonArt Sierra Cascade 5005-38
- * Self Edge: WilsonArt Sierra Cascade 5005-38
- * Cabinet Laminate: Panolam, Pattern: Pepperdust HP451SD

1	ea	Area: Classroom 345, Lower Floor Cabinets With 4" H Backsplash, 4" Toe Kick and Filler Pieces (1) Adjustable Shelf For Each Storage Cabinet
---	----	--



QUOTATION: 26-0324-DR

Date Issued: 3/24/26

Page: 3 of 4

To: Boyceville Community School District
1003 Tiffany Street
Boyceville, WI 54725

Attn: Nick Kaiser
Phone: 715-643-3647
Email: nicholask@boyceville.k12.wi.us

We are pleased to quote you as follows:

QUANTITY ITEM NUMBER AND DESCRIPTION

Area: Classroom 346

- * Per Drawing A1 (Dated 03.17.2026)
* Surface Laminate: WilsonArt Sierra Cascade 5005-38
* Self Edge: WilsonArt Sierra Cascade 5005-38
* Cabinet Laminate: Panolam, Pattern: Pepperdust HP451SD

1 ea Area: Classroom 346, Lower Floor Cabinets With 4" H Backsplash and 4" Toe Kick
(1) Adjustable Shelf For Each Storage Cabinet

Area: Classroom 347

- * Per Drawing A1 (Dated 03.17.2026)
* Surface Laminate: WilsonArt Sierra Cascade 5005-38
* Self Edge: WilsonArt Sierra Cascade 5005-38
* Cabinet Laminate: Panolam, Pattern: Pepperdust HP451SD

1 ea Area: Classroom 347, Lower Floor Cabinets With 4" H Backsplash and 4" Toe Kick
(1) Adjustable Shelf For Each Storage Cabinet

1 ea Area: Classroom 347, 2-Drawer (File File) Unit With PLAM Surface

2 ea Area: Classroom 347, (2) Wardrobe - 48Wx24Dx84H
(4) Adjustable Shelves For Each Wardrobe Cabinet

Area: Room 401 - AD Office

- * Per Drawing A1 (Dated 03.18.2026)
* Surface Laminate: WilsonArt Sierra Cascade 5005-38
* Self Edge: WilsonArt Sierra Cascade 5005-38
* Cabinet Laminate: Panolam, Pattern: Pepperdust HP451SD

1 ea Area: Room 401, Lower Floor Cabinets With 4" H Backsplash and 4" Toe Kick
(1) Adjustable Shelf For Each Storage Cabinet

2 ea Area: Room 401, (2) Wardrobe - 48Wx24Dx84H
(4) Adjustable Shelves For Each Wardrobe Cabinet

* EC Business Interiors To Confirm Field Measurements Prior To Order *

Table with 2 columns: Description and Price. Row 1: Boyceville Community School District Demolition of Existing Custom PLAM Casework Custom Plastic Laminate, Delivered & Installed. Row 2: Grand Total \$68,930.00. Row 3: * Above Total Does Not Include Sales Tax - Exempt Project



QUOTATION: 26-0324-DR

Date Issued: 3/24/26

Page: 4 of 4

To: Boyceville Community School District
1003 Tiffany Street
Boyceville, WI 54725

Attn: Nick Kaiser
Phone: 715-643-3647
Email: nicholask@boyceville.k12.wi.us

We are pleased to quote you as follows:

QUANTITY ITEM NUMBER AND DESCRIPTION

** Quotation Continued For EC Business Interiors Standard Terms Portion **

TERMS:

- *Pricing is Valid For 45 Days.*
Product leadtime is approximately 8-11 weeks from date of order entry.
Payment terms: 30% down, remainder due; net 10 days from invoice date.
Terms: 1-1/2% per month late payment charge will be assessed on all past due invoices. \$5.00 minimum charge.
A convenience fee of 4.75% will be added to payments made by credit card.
All products ordered are non-returnable to the manufacturer.
Pricing based on quantities quoted above; changes in quantity ordered, could result in product price changes.
Price includes freight, delivery, installation and waste removal.
Price is subject to all applicable sales tax unless provided exemption form.
Lease financing available.

[Signature]
Thomas Robarge, General Manager


Accepted By: _____

Title: _____


Purchase Order: _____

Date: _____

Admin Office: (need backsplash)

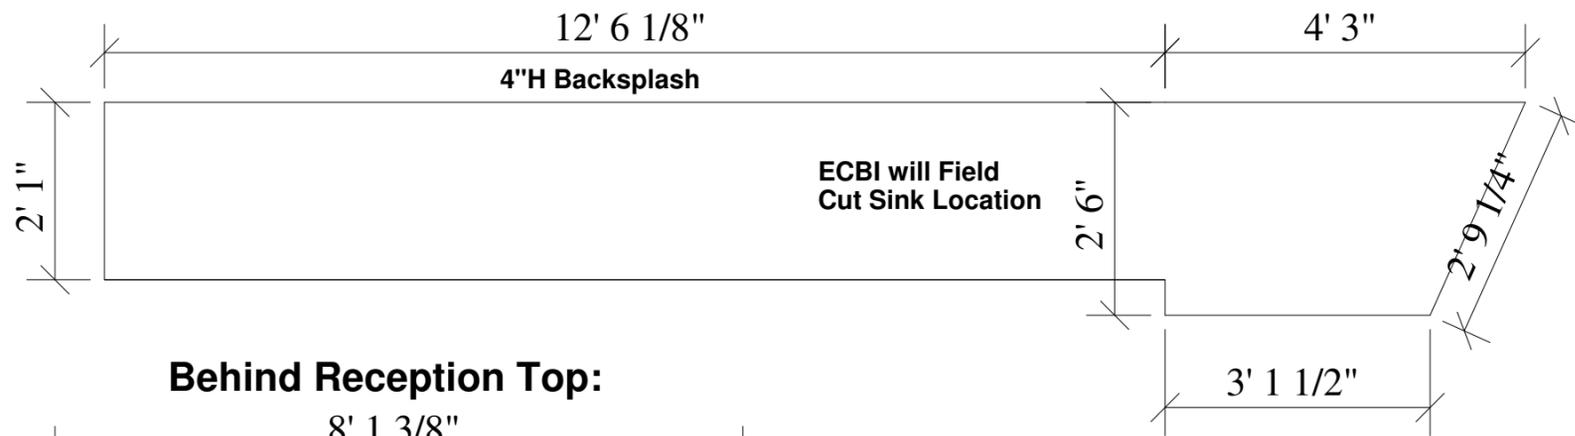


Cubby Top:

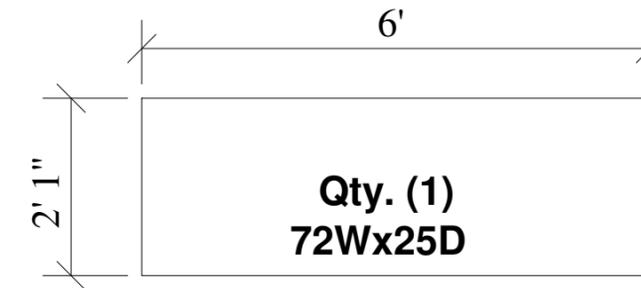


Qty. (1)
72Wx25D

Behind Reception Top:

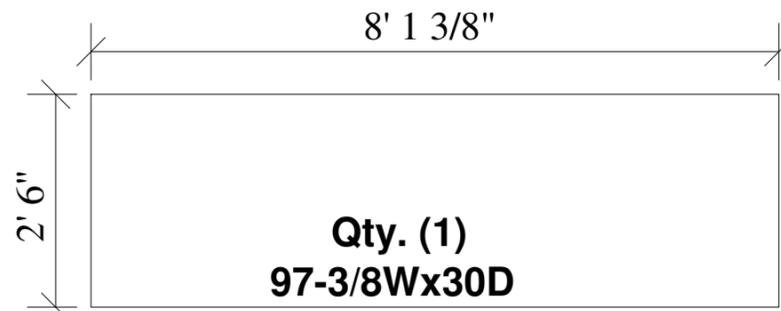


Qty. (1)
97-3/8Wx30D

Backroom Tops:

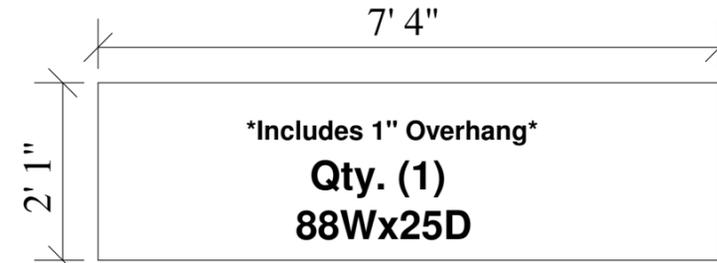

Includes 1" Overhang
Qty. (1)
88Wx25D

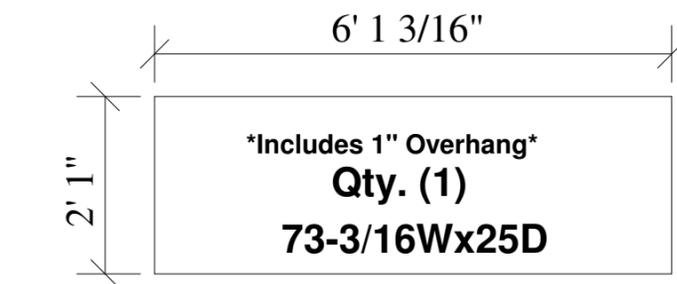


Includes 1" Overhang
Qty. (1)
73-3/16Wx25D


Laminate: Wilsonart Sierra Cascade 5005-38
1-1/8" Thick Surfaces

**Business Services/Fish Bowl:
Modesty Panels**

Modesty Panel Thickness: 1/4" Thick




Qty. (1)
29-7/8W x 27-1/2H

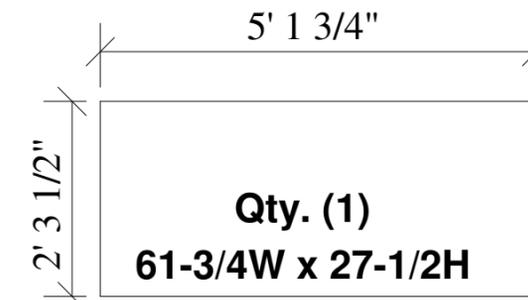


Qty. (1)
61-3/4W x 27-1/2H

Laminate: Pionite Absolute Acajou WY1605D

Drawer Units

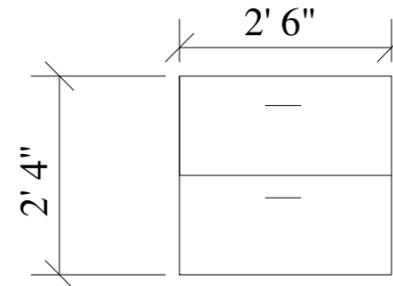

Qty. (1)
30W x 17-7/8D x 28H
File File Pedestal
Wire Pulls
With Lock



Qty. (1)
15W x 17-7/8D x 28H
Box Box File Pedestal
Wire Pulls
With Lock

Laminate: Pionite Absolute Acajou WY1605D

A1

03.18.26


Option 1
Plan View
1/2"=1'-0"

321 - Tops & Misc. Items
Boyceville School District
Boyceville, WI

Eau Claire Business Interiors
2224 Mercantile Drive
Eau Claire, WI 54703


Note: Missing laminate panel piece - ECBI to repair in field 28"W x 31"H

Top View

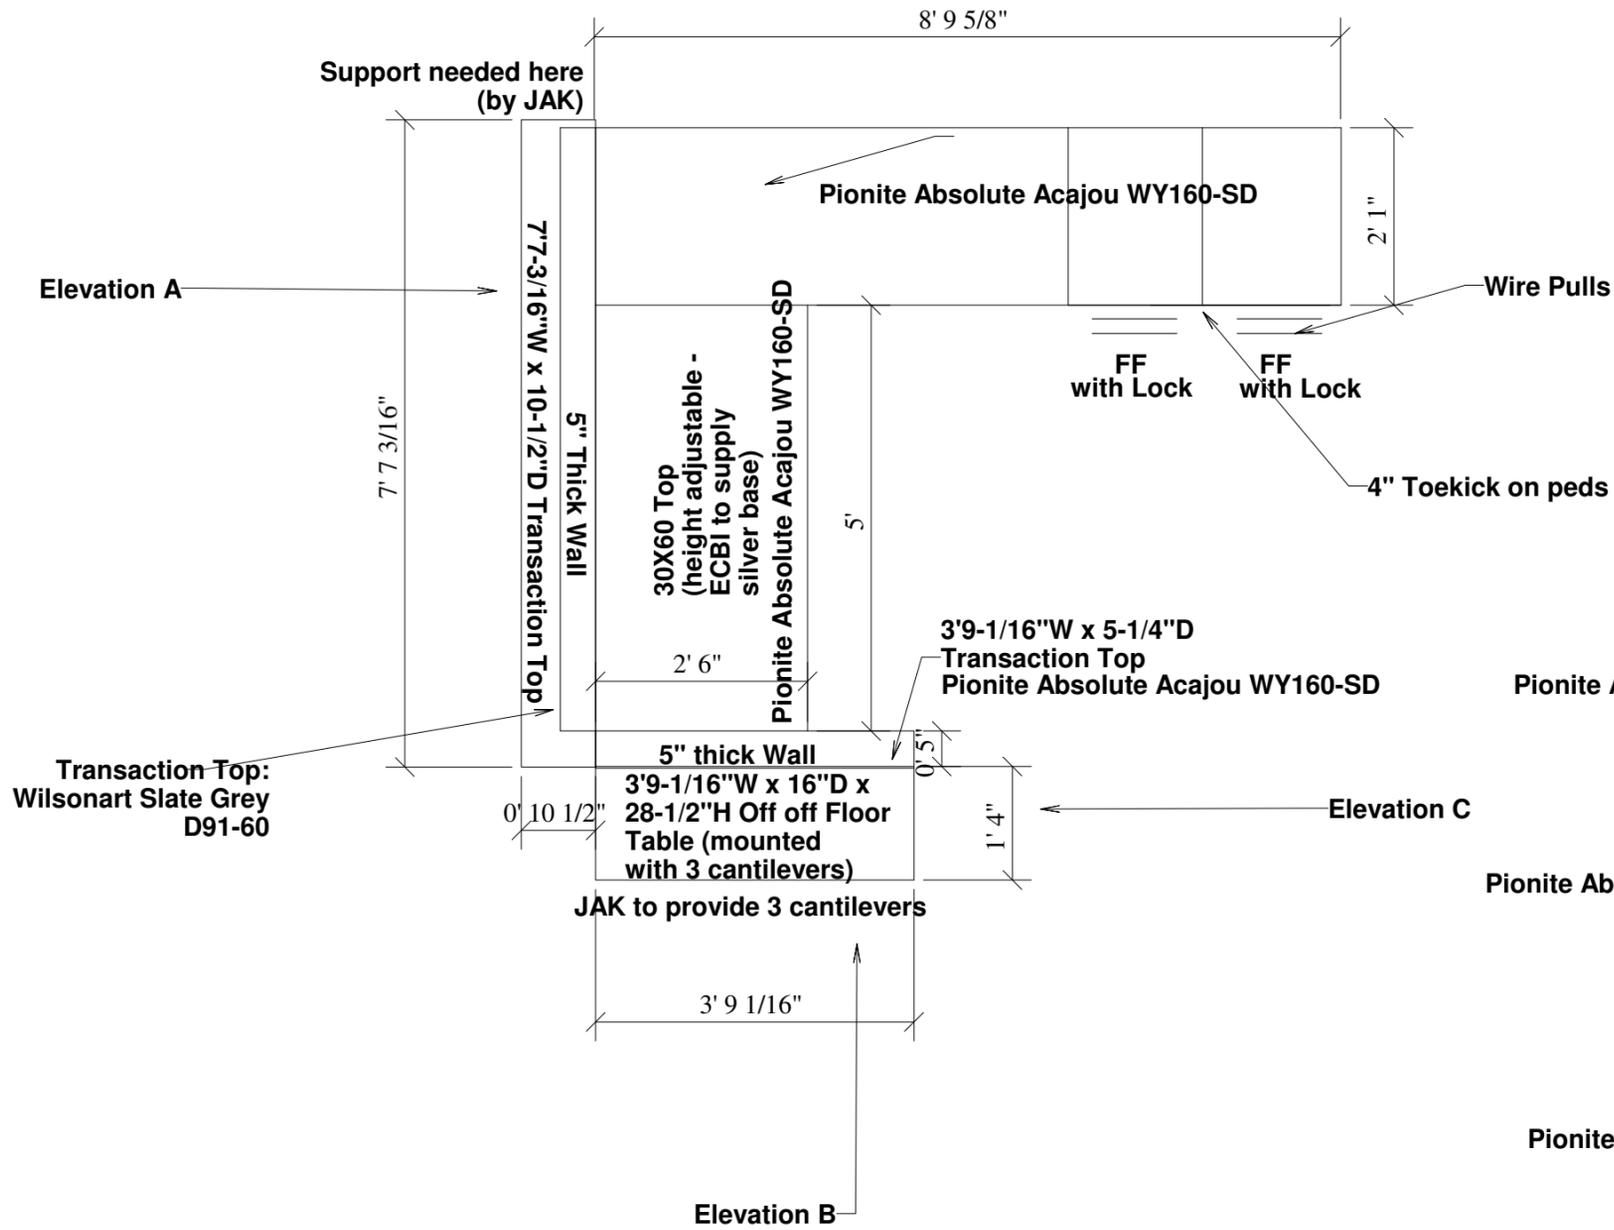


Wilsonart Slate Grey D91-60


Elevation A

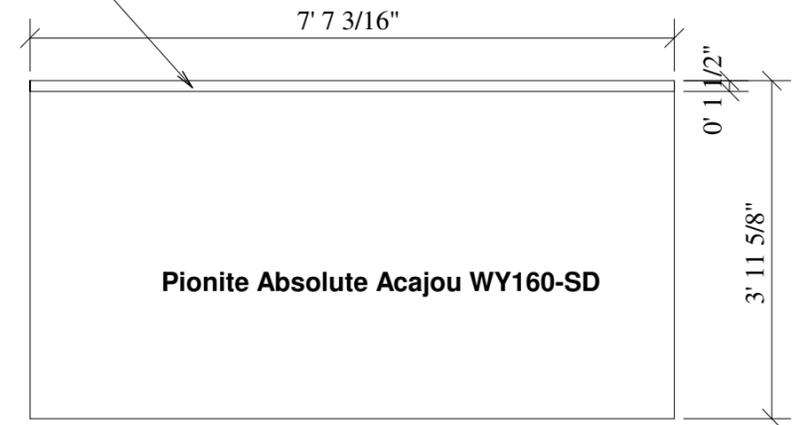

Elevation B

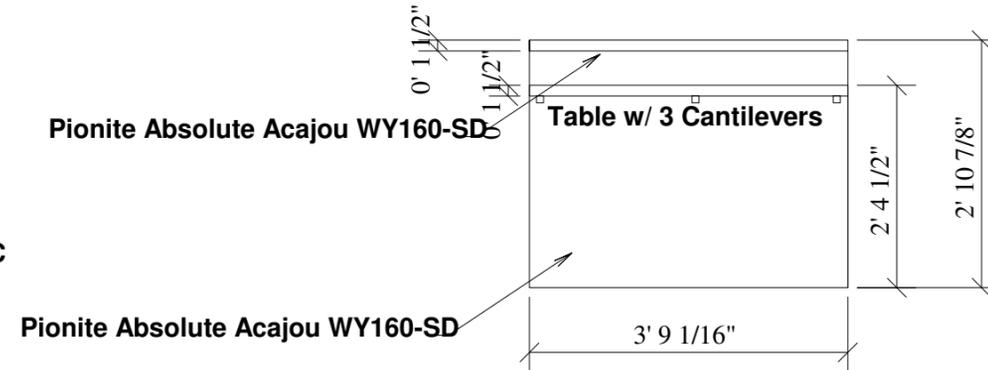

Elevation C

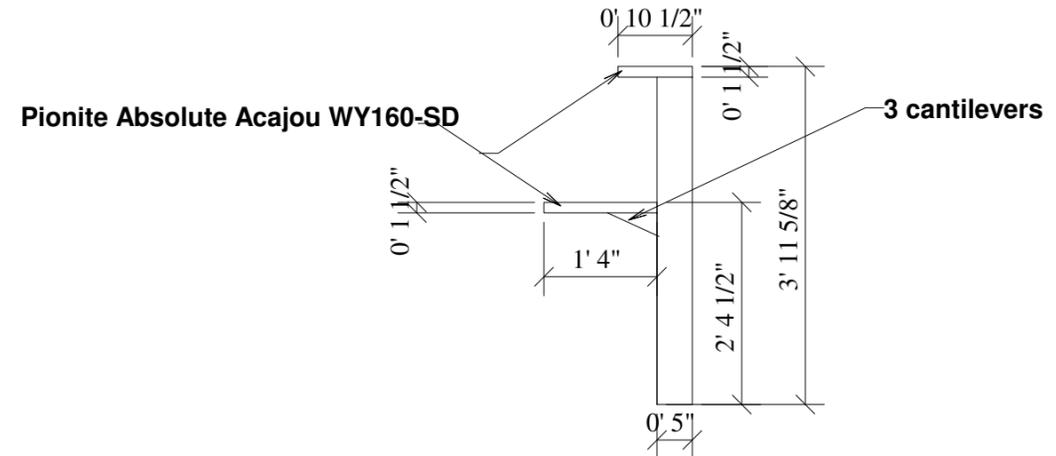

* Construct wall similar to JAK SO # S14973 *

A1

03.17.26

Option 1
Plan View
1/2" = 1'-0"

Admin Assistant 321
Boyceville School District
Boyceville, WI

Eau Claire Business Interiors
2224 Mercantile Drive
Eau Claire, WI 54703

A1

03.18.26


Option 1
Plan View
1/2" = 1'-0"

Classroom 333
Boyceville School District
Boyceville, WI

Eau Claire Business Interiors
2224 Mercantile Drive
Eau Claire, WI 54703


Top View

22' 6"

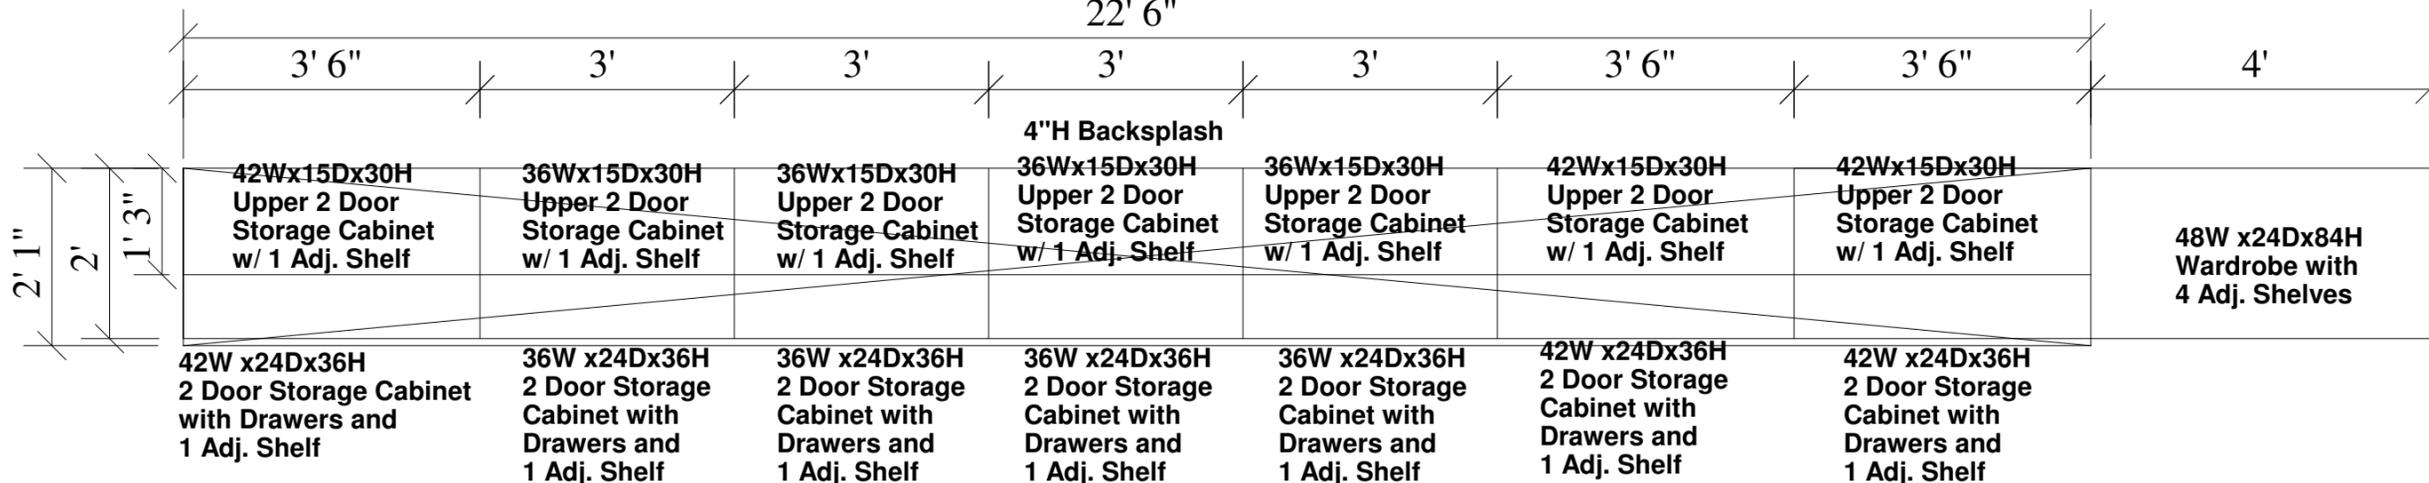

Front View

Ceiling Height = 98"

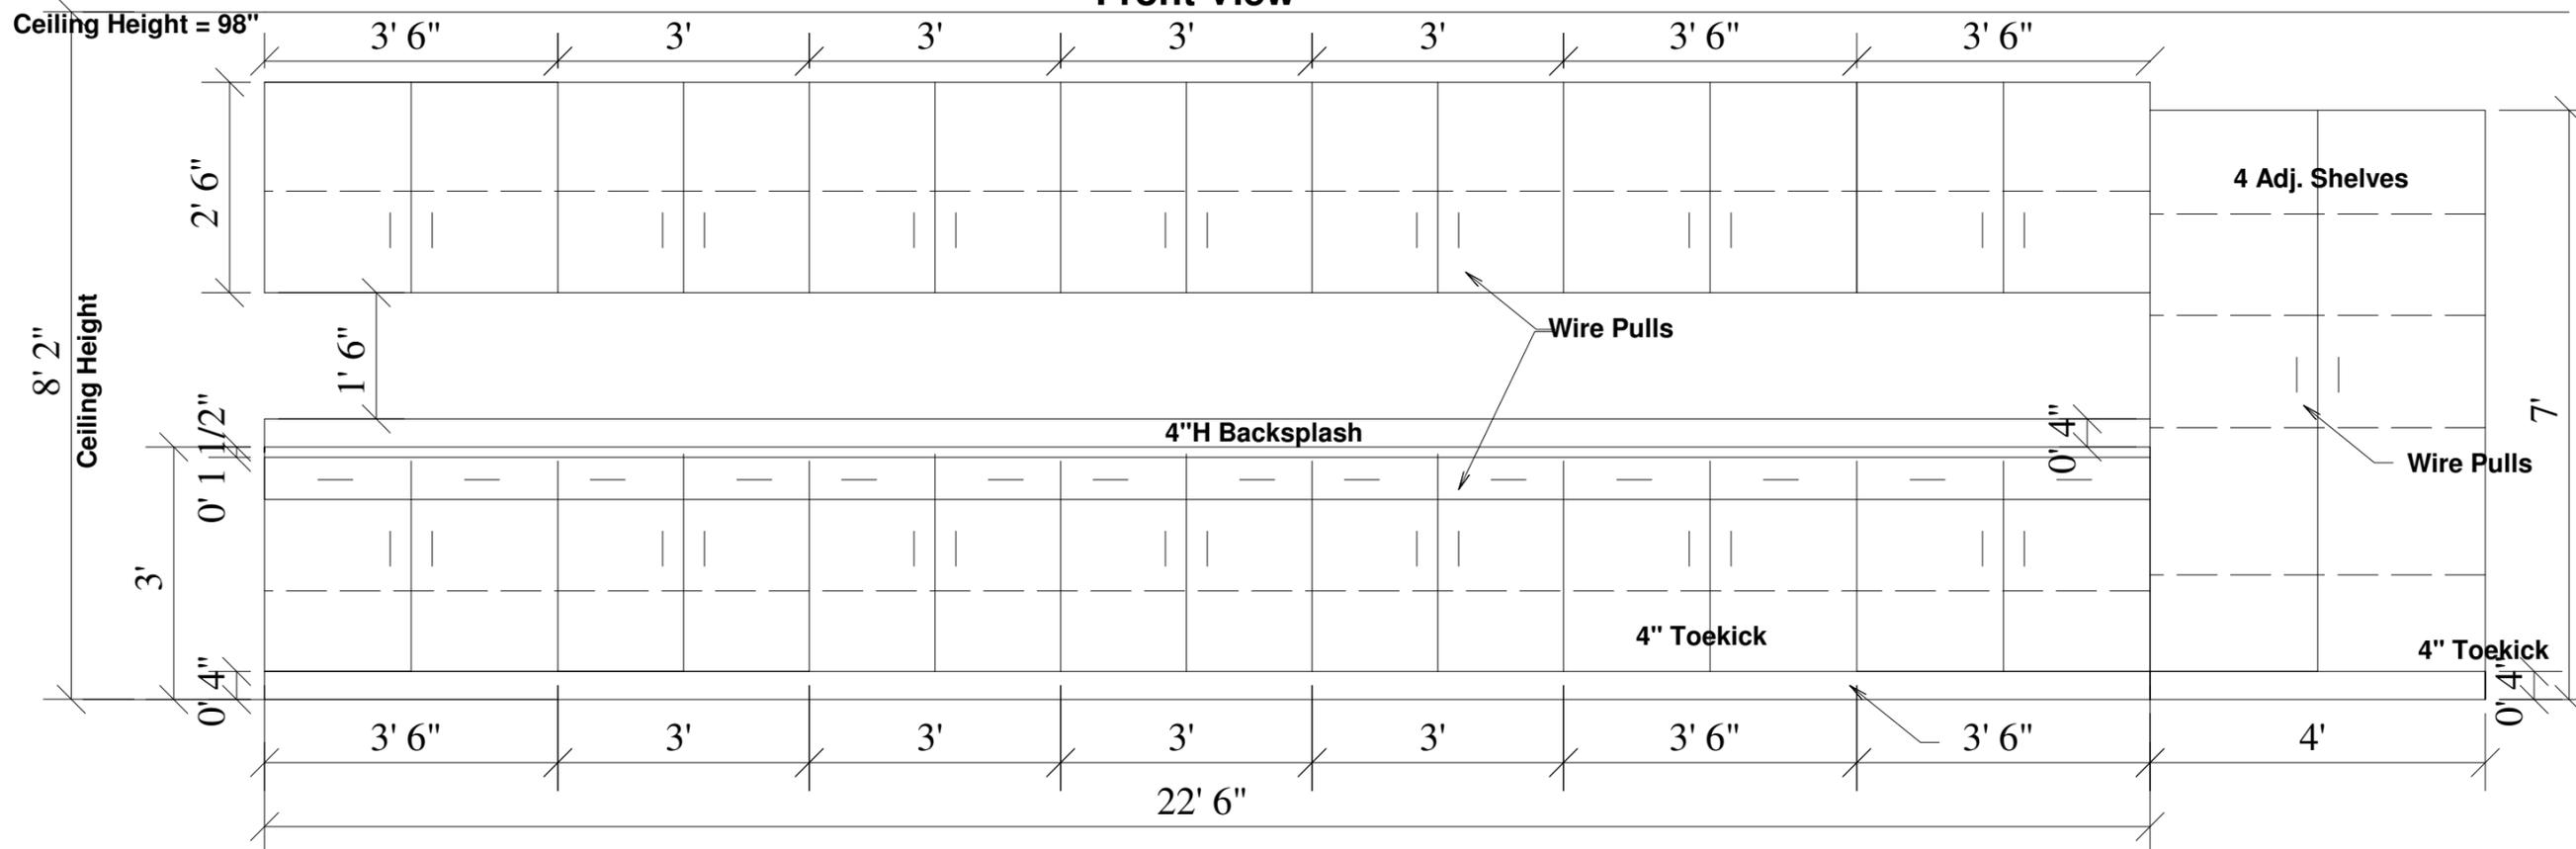

Surface Laminate: Wilsonart Sierra Cascade 5005-38
Self Edge: Wilsonart Sierra Cascade 5005-38
Cabinet Laminate: Panolam Pepperdust HP451SD

A1


03.18.26

Option 1
Plan View
1/2"±1'-0"


Classroom 334
Boyceville School District
Boyceville, WI

Eau Claire Business Interiors
2224 Mercantile Drive
Eau Claire, WI 54703

Top View

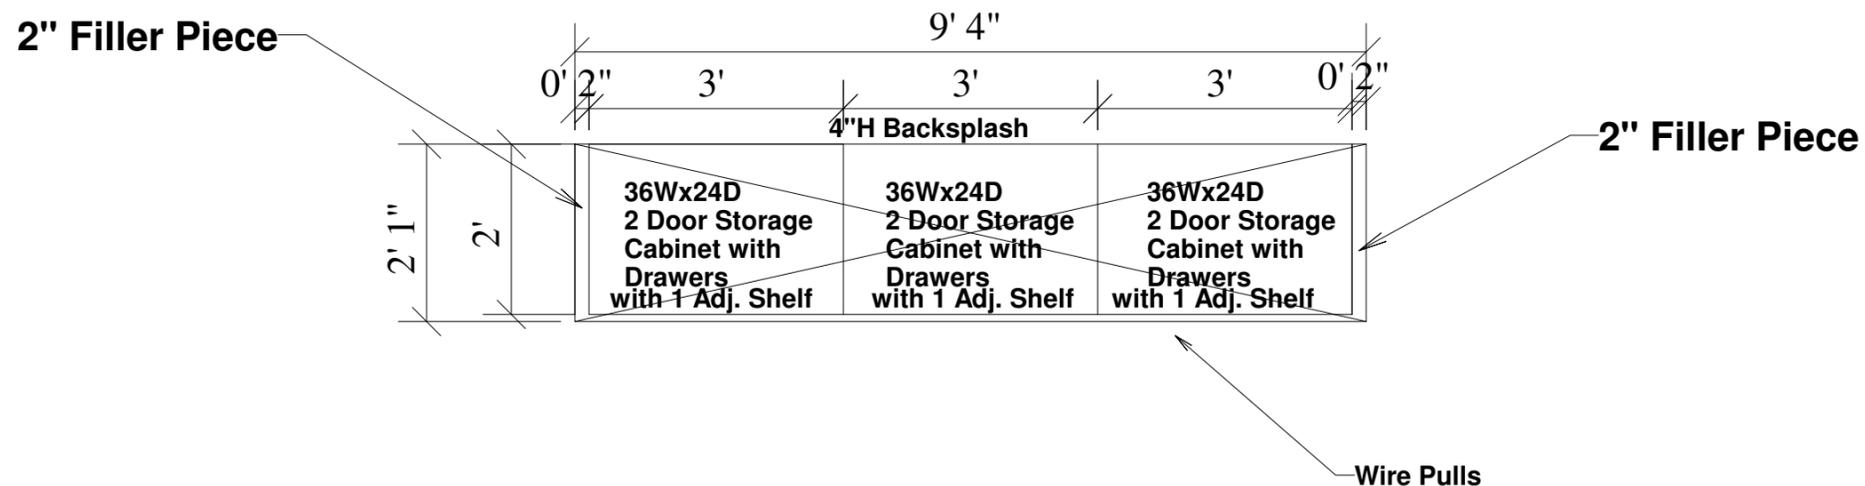

Front View

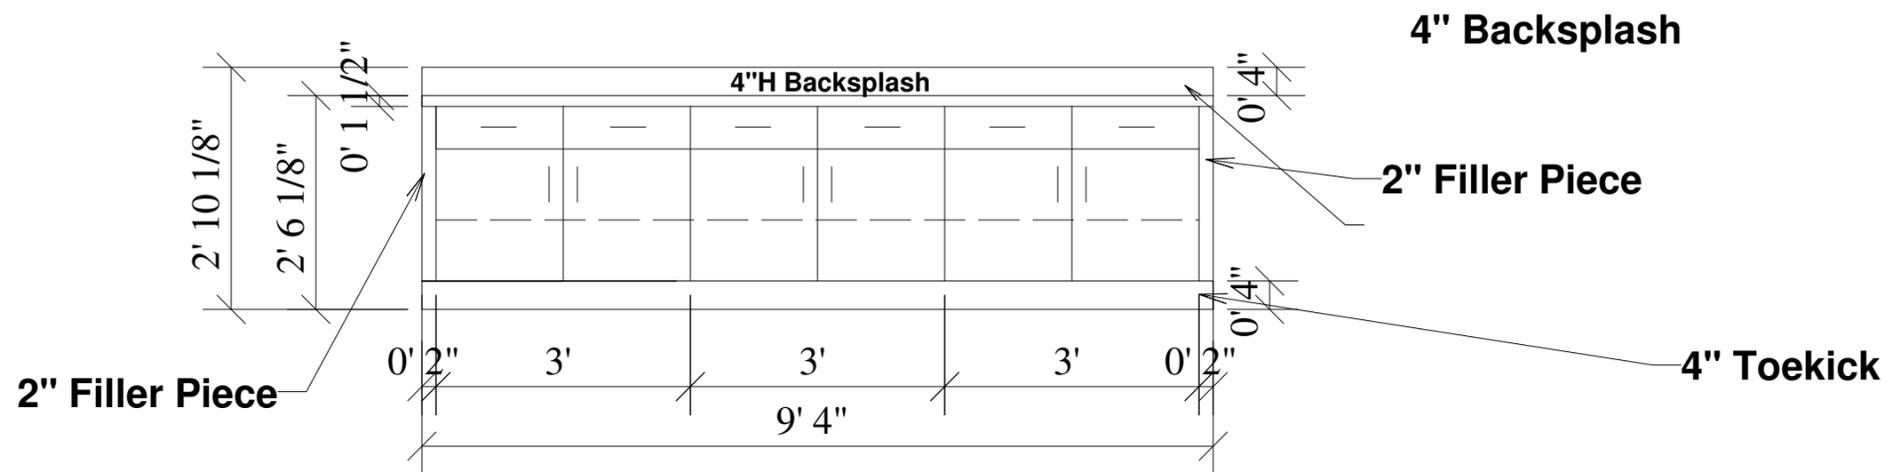

Surface Laminate: Wilsonart Sierra Cascade 5005-38
Self Edge: Wilsonart Sierra Cascade 5005-38
Cabinet Laminate: Panolam Pepperdust HP451SD

A1


03.17.26

Option 1
Plan View
1/2" = 1'-0"


Classroom 345
Boyceville School District
Boyceville, WI

Eau Claire Business Interiors
2224 Mercantile Drive
Eau Claire, WI 54703

Top View

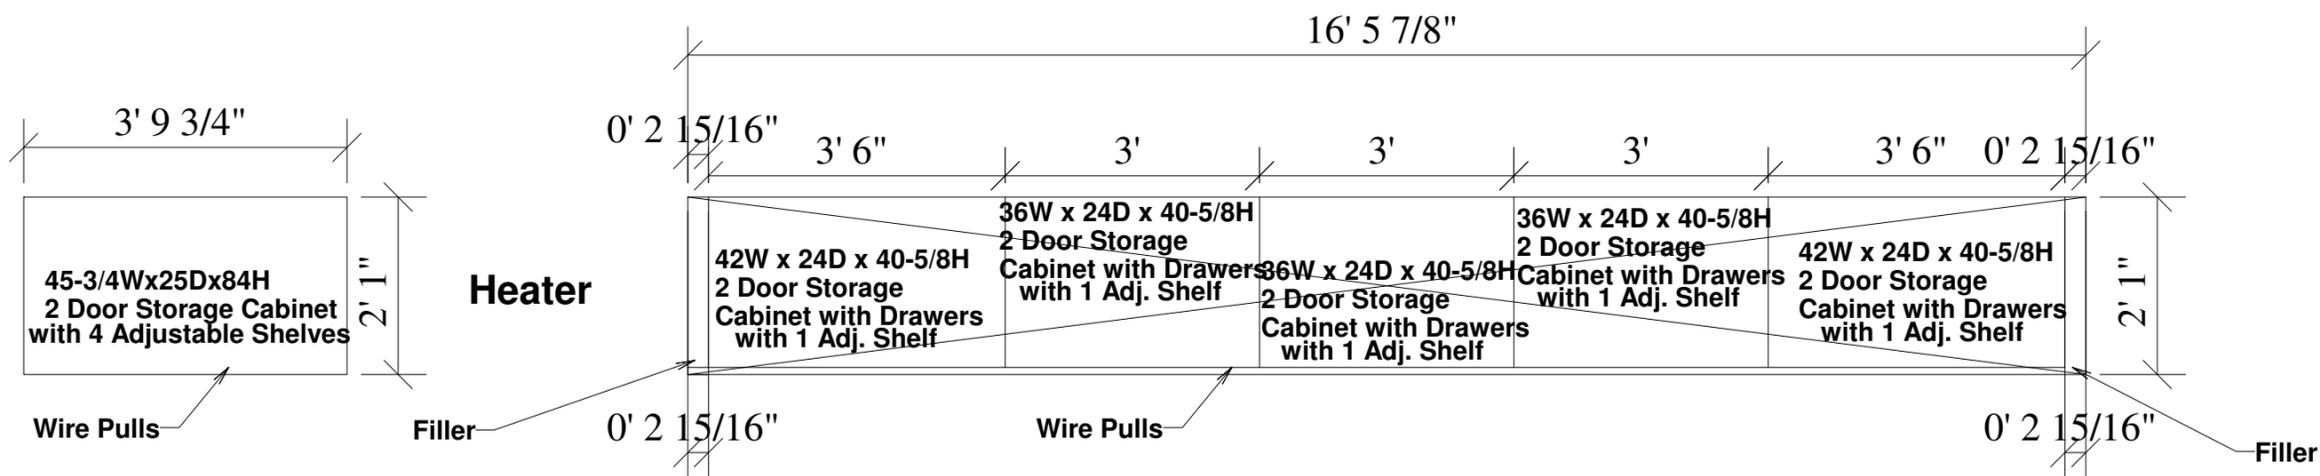


Front View

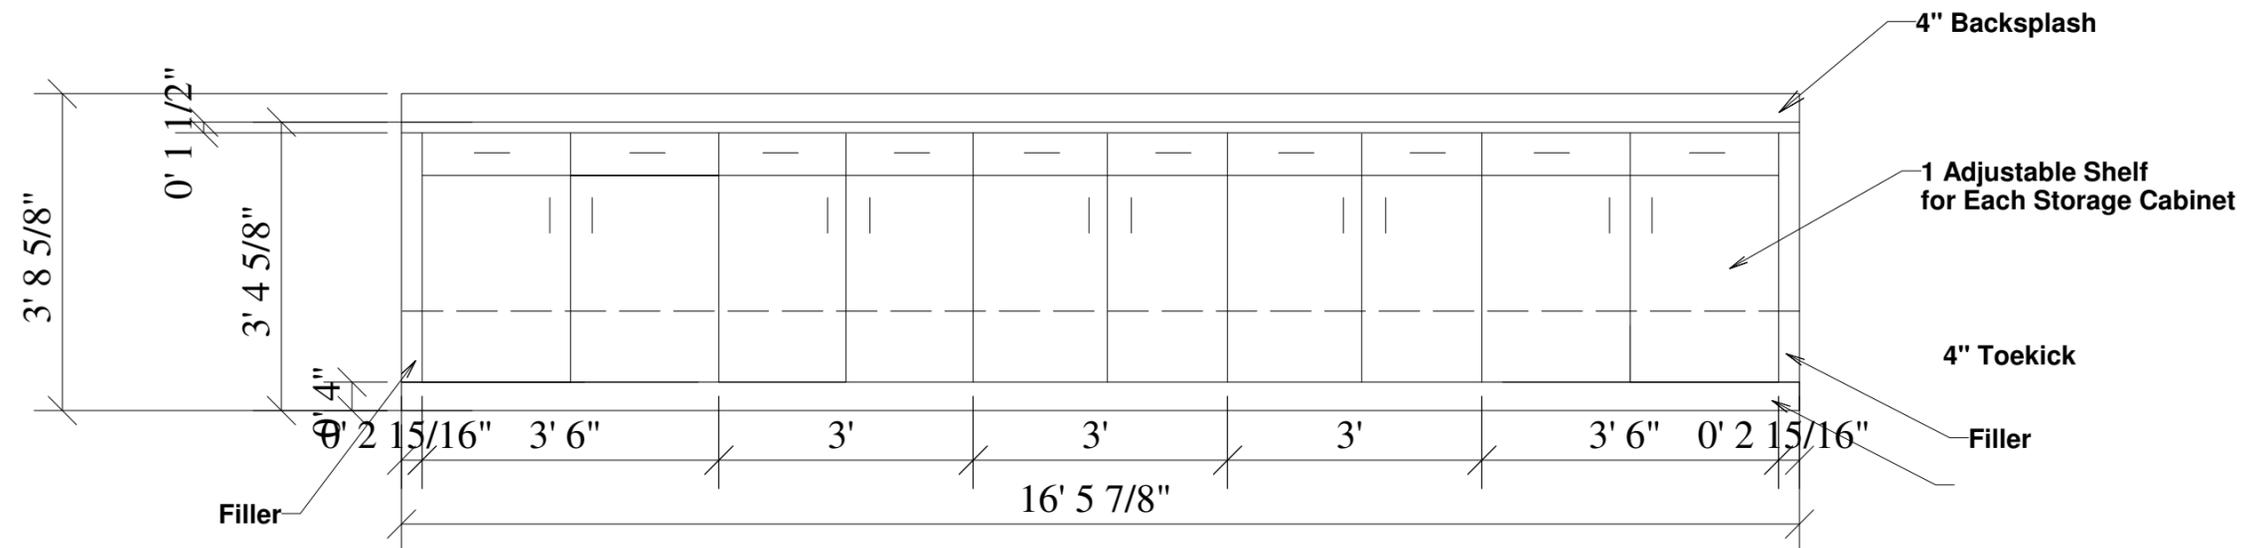


Surface Laminate: Wilsonart Sierra Cascade 5005-38
Self Edge: Wilsonart Sierra Cascade 5005-38
Cabinet Laminate: Panolam Pepperdust HP451SD

Top View

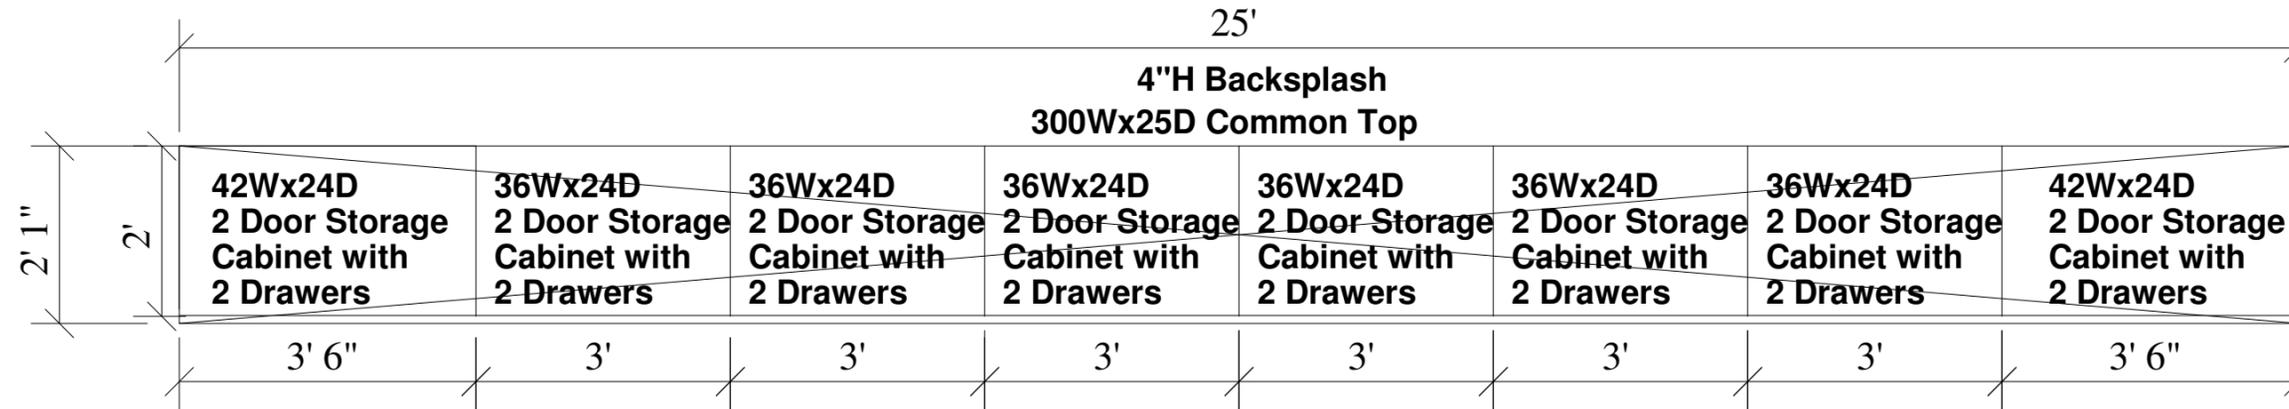

Front View

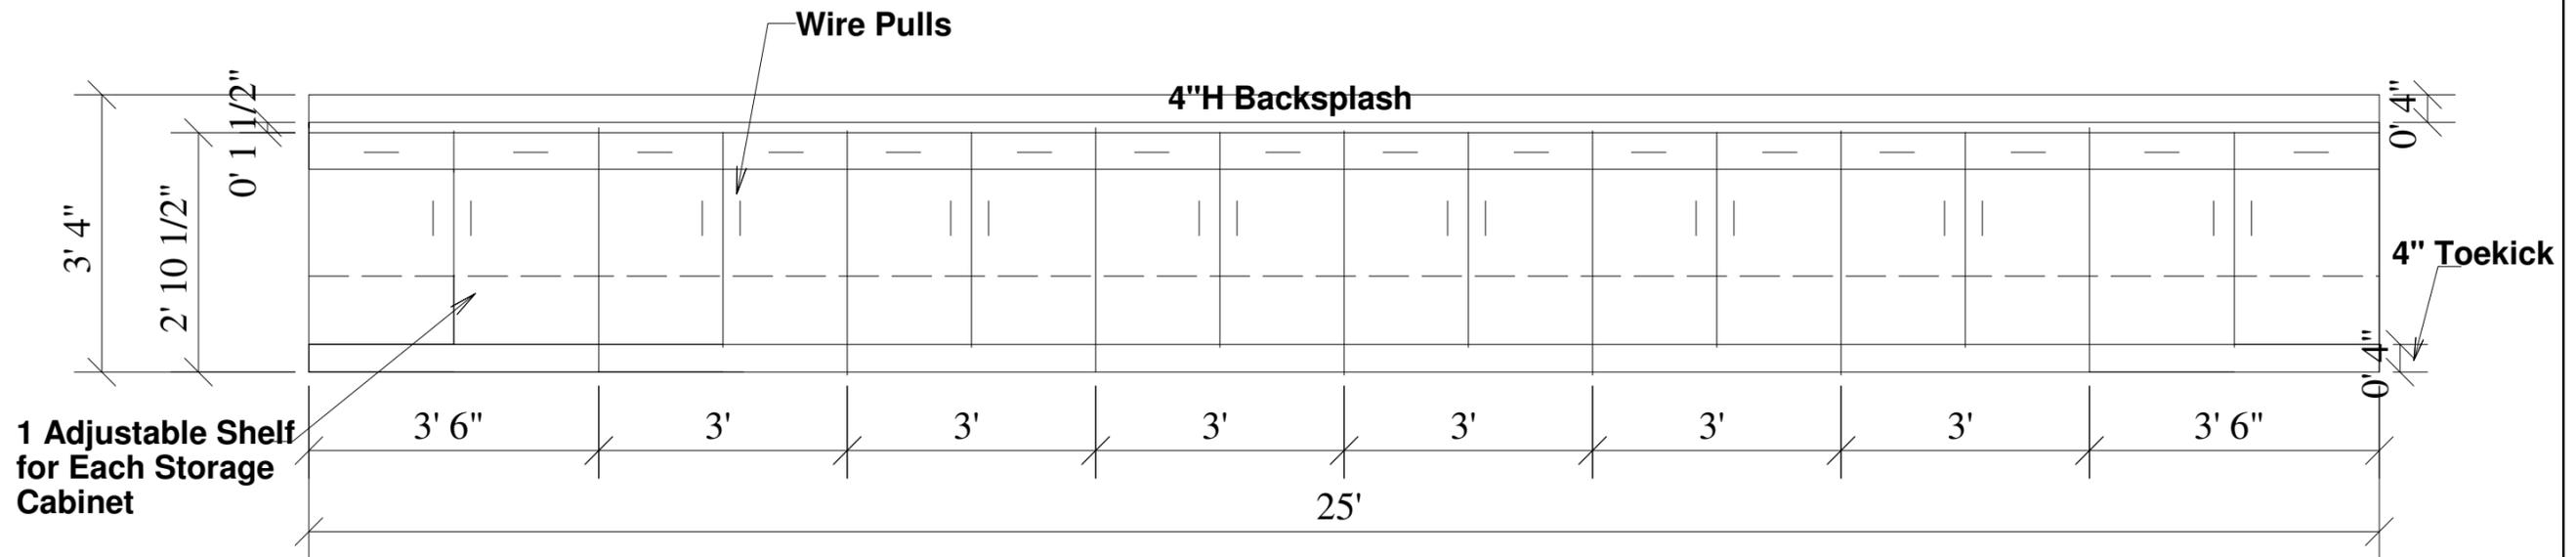

Surface Laminate: Wilsonart Sierra Cascade 5005-38
Self Edge: Wilsonart Sierra Cascade 5005-38
Cabinet Laminate: Panolam Pepperdust HP451SD

A1

03.17.26

Option 1
Plan View
1/2" = 1'-0"

Classroom 346
Boyceville School District
Boyceville, WI

Eau Claire Business Interiors
2224 Mercantile Drive
Eau Claire, WI 54703

A1

03.17.26

Option 1
Plan View
1/2"=1'-0"

Classroom 347
Boyceville School District
Boyceville, WI

Eau Claire Business Interiors
2224 Mercantile Drive
Eau Claire, WI 54703

Top View

14' 4 1/2"

3' 8 1/4"

3' 6"

3' 6"

3' 8 1/4"

4H" Backsplash

44-1/2Wx24Dx24-3/8H
2 Door Storage
Cabinet with Drawers
& 1 Adjustable Shelf


42Wx24Dx24-3/8H
2 Door Storage
Cabinet with Drawers
& 1 Adjustable Shelf

42Wx24Dx24-3/8H
2 Door Storage
Cabinet with Drawers
& 1 Adjustable Shelf

44-1/2Wx24Dx24-3/8H
2 Door Storage
Cabinet with Drawers
& 1 Adjustable Shelf

Quantity: (2)

48Wx24Dx84H
2 Door Wardrobe
with 4 Adj. Shelves

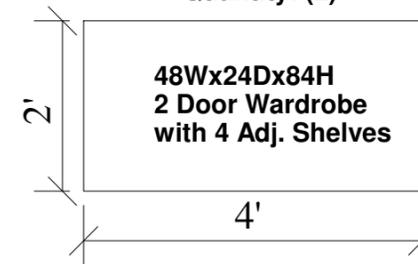

4'

Front View

14' 4 1/2"

4"H Backsplash

0' 4"

Wire Pulls

0' 1 1/2"


2' 8 7/8"

3' 2 3/8"

Wire Pulls

Quantity: (2)

48Wx24Dx84H
2 Door Wardrobe
with 4 Adj. Shelves

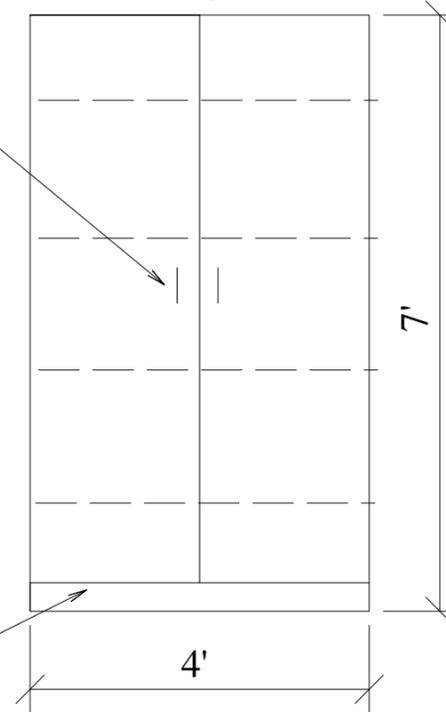


7'

4" Toekick

4'

38-3/8H File File Ped with Top

3' 8 1/8"

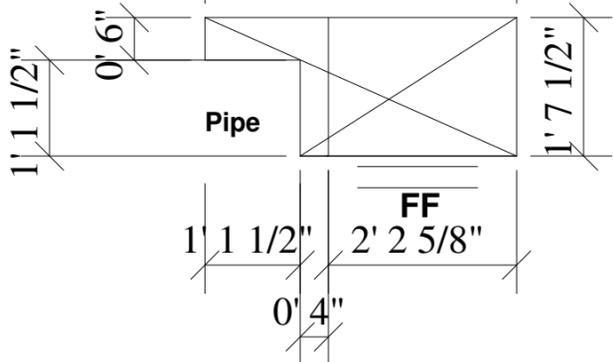

Heater

Pipe

FF


1' 1 1/2"

2' 2 5/8"


0' 4"

Surface Laminate: Wilsonart Sierra Cascade 5005-38
Self Edge: Surface Laminate: Wilsonart Sierra Cascade 5005-38
Cabinet Laminate: Panolam Pepperdust HP451SD

Top View

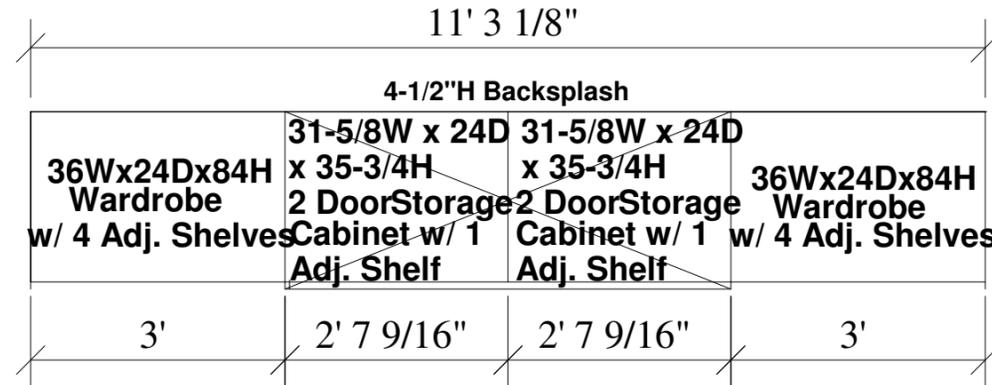

Front View

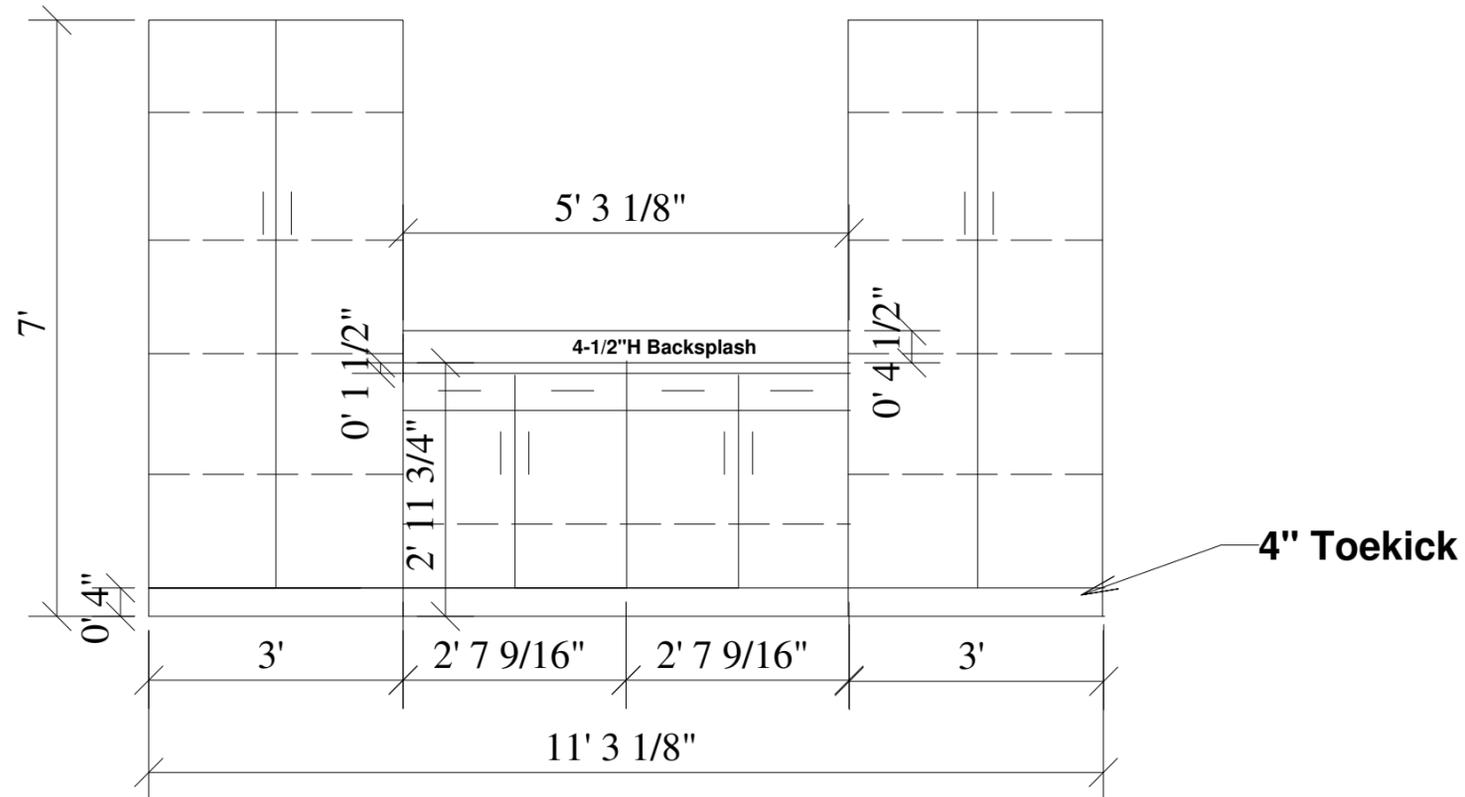

Surface Laminate: Wilsonart Sierra Cascade 5005-38
Self Edge: Wilsonart Sierra Cascade 5005-38
Cabinet Laminate: Panolam Pepperdust HP451SD

A1

03.18.26

Option 1
Plan View
1/2" = 1'-0"

AD Office 401
Boyceville School District
Boyceville, WI

Eau Claire Business Interiors
2224 Mercantile Drive
Eau Claire, WI 54703